


TOB5142

ASSEMBLY & INSTALLATION GUIDE

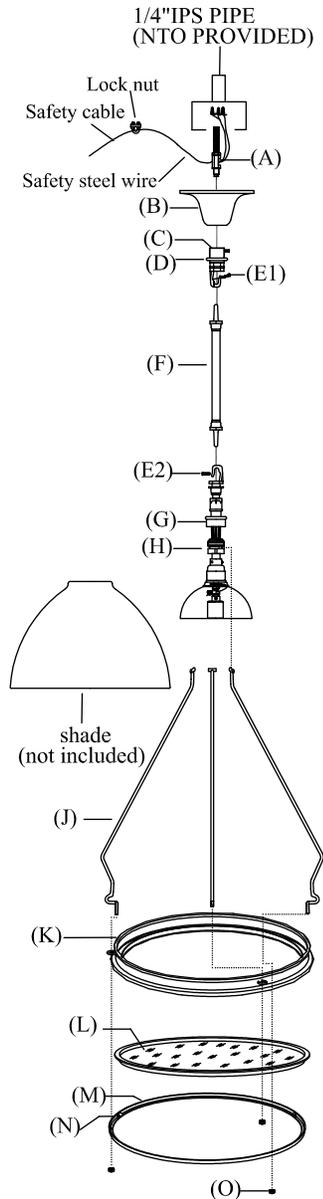

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. To insert glass panel (M) provided to glass holder (N), make sure metal tabs (O) are flipped against the opening of frame. Place glass panel (M) onto glass holder (N) and secure glass panel (M) by bending back metal tabs (O)
2. Insert light bulb into the socket.
3. Attach shade holder (L) onto the glass panel and glass holder (O) carefully, and place shade (not included) onto shade holder (L). Feed support rods (K) through small rings on edge of the shade holder (L) and glass holder (N), screw cap nuts onto the exposed threaded section to secure (J) to (K) & (M).
4. Loosen screw collar (H), attach the end of three support rods (K) to the corresponding concave areas of part (J) and secure with screw collar (H).
5. Feed wires through pole (G), attach bottom loop of pole (G) to top loop on part (J), insert the set screw (F2) at side.
6. Slide canopy ring (E) and canopy (C) on the pole (G), attached top loop of pole (G) to the hook of mounting loop (C), and insert the set screw (F1) at side.
7. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See illustration A)
8. Attach ground (silver or copper in color) fixture wire to ground wire from ceiling outlet box (usually green or copper in color), and fasten together with a plastic wire connector.
9. Tightly wrap the wire connector with electrical tape so the end of the connector is (not included) sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUND .
10. Connect the neutral (RIBBED, without any marking) fixture wire to the neutral (usually white) wire from ceiling outlet box. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
11. Repeat the procedure with the hot (ROUND, with UL marking on) wire to hot (usually black) outlet wire. Always make sure that no wire strands are left outside of the connections. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
Tuck wire connection neatly into ceiling outlet box.
12. Remove nipple (A) from chain mounting loop (C) by loosening set screw at side of (C) and Insert top thread nipple (A) to center 1/4" IPS support pipe and screw mounting loop (C) to the nipple (A) using set screw.
13. Slip canopy (B) to ceiling and secure by canopy ring (D).
14. Assembly is complete, test the fixture.